


OVERVIEW	Designer Year	Hakumei 2026
	Dimensions	Ø80 × H10 cm, hung on adjustable cables
	Weight	approx. 1.76 kg complete (1107 g printed)
	Material	Shade: translucent PLA. Joint blocks: matte PLA. Hoop: aluminium tube.
	Origin	Designed and printed in Malaysia
	Assembly	Glowing arcs and joint blocks threaded on an aluminium hoop; no magnets
	Colours	Shade: any of 5 translucent colours. Other parts: any of 5 matte colours, each part its own
ILLUMINATION	Light source	LED strip, 24 V, along the hoop's underside, included
	Light output	approx. 2,179 lm
	Colour temperature	2700 K
POWER	Input	24 V DC from the plug-in adaptor supplied
	Max. usage	approx. 23 W
	Plug	Type G (MY, SG, HK), Type I (AU, NZ, CN), Type C (TH), Type A (TW, CA)
DIMMING	Dimmable with the in-line dimmer supplied.	
SUSPENSION	Cables	Three steel cables from a ceiling canopy, adjustable
	Lead	Runs up one cable to the canopy, then to the adaptor at a socket
	Connection	Plugs into a socket; no wiring into the building
CARE	Indoor use only. Dust with a dry cloth or a soft brush; keep acetone, solvents and harsh cleaners away from the printed parts. Use only the adaptor supplied. Keep out of hot direct sun.	
MATERIALITY	Printed to order, one fine layer at a time, so faint layer lines are part of the surface. Tint can vary slightly between spools: for lamps that must match, order them together.	



OVERVIEW	Designer Year	Hakumei 2026
	Dimensions	Ø120 × H11.4 cm, hung on adjustable cables
	Weight	approx. 2.85 kg complete (1897 g printed)
	Material	Shade: translucent PLA. Joint blocks: matte PLA. Hoop: aluminium tube.
	Origin	Designed and printed in Malaysia
	Assembly	Glowing arcs and joint blocks threaded on an aluminium hoop; no magnets
	Colours	Shade: any of 5 translucent colours. Other parts: any of 5 matte colours, each part its own
ILLUMINATION	Light source	LED strip, 24 V, along the hoop's underside, included
	Light output	approx. 3,337 lm
	Colour temperature	2700 K
POWER	Input	24 V DC from the plug-in adaptor supplied
	Max. usage	approx. 35 W
	Plug	Type G (MY, SG, HK), Type I (AU, NZ, CN), Type C (TH), Type A (TW, CA)
DIMMING	Dimmable with the in-line dimmer supplied.	
SUSPENSION	Cables	Three steel cables from a ceiling canopy, adjustable
	Lead	Runs up one cable to the canopy, then to the adaptor at a socket
	Connection	Plugs into a socket; no wiring into the building
CARE	Indoor use only. Dust with a dry cloth or a soft brush; keep acetone, solvents and harsh cleaners away from the printed parts. Use only the adaptor supplied. Keep out of hot direct sun.	
MATERIALITY	Printed to order, one fine layer at a time, so faint layer lines are part of the surface. Tint can vary slightly between spools: for lamps that must match, order them together.	

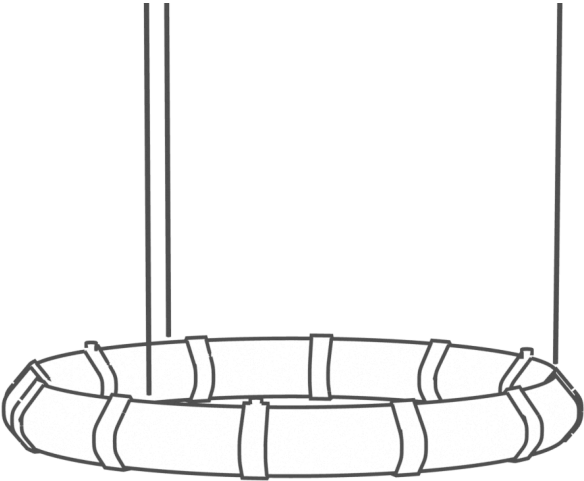