DROP Ø13 · SMALL

OVERVIEW	Designer | Year	Hakumei | 2026
	Dimensions	Ø13.1 × H12.8 cm
	Material	Shade: translucent PLA. Cap: matte PLA.
	Origin	Designed and printed in Malaysia
	Assembly	One printed piece, its cap in a second colour
	Colours	Shade: any of 5 translucent colours. Other parts: any of 9 matte colours, each part its own
ILLUMINATION	Light source	LED, E27 G45 golf-ball bulb, included
	Light output	approx. 500 lm
	Colour temperature	2700 K
	CRI	approx. 80+
	Life hours	approx. 15,000
POWER	Input	220–240 V AC; 110–120 V for Canada and Taiwan
	Max. usage	approx. 6 W
	Connection	Wired to a ceiling point by a qualified electrician
DIMMING	Not dimmable as supplied.	
SUSPENSION	Cord	1, 2 or 3 m twisted fabric (your choice), adjustable drop
	Ceiling rose	Replaces the existing fitting
	Lampholder	E27
CARE	Indoor use only. Dust with a dry cloth or a soft brush; keep acetone, solvents and harsh cleaners away from the printed parts. LED bulbs only, never incandescent or halogen: they run far hotter than a printed lamp is made for. Keep out of hot direct sun.	
MATERIALITY	Printed to order, one fine layer at a time, so faint layer lines are part of the surface. Tint can vary slightly between spools: for lamps that must match, order them together.	

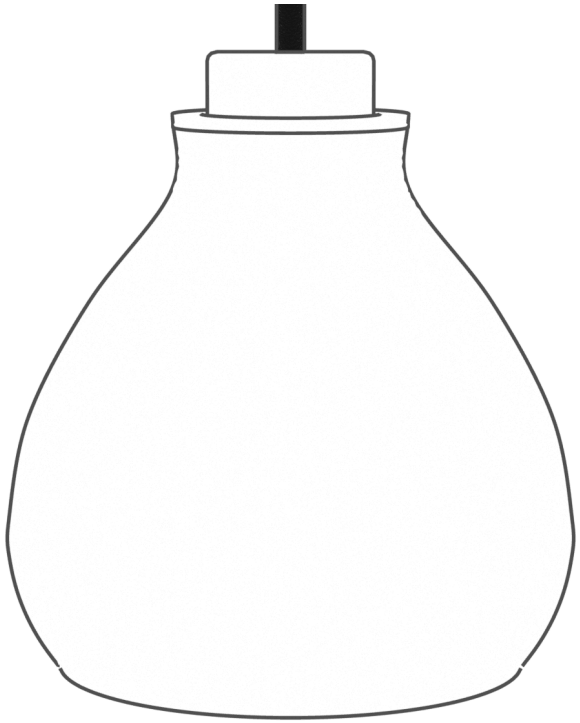

Figures marked approx. are typical of the bulb and fittings supplied and are confirmed against the first lamps made. Specifications may change.

DROP Ø16 · MEDIUM

OVERVIEW	Designer | Year	Hakumei | 2026
	Dimensions	Ø16.4 × H16 cm
	Material	Shade: translucent PLA. Cap: matte PLA.
	Origin	Designed and printed in Malaysia
	Assembly	One printed piece, its cap in a second colour
	Colours	Shade: any of 5 translucent colours. Other parts: any of 9 matte colours, each part its own
ILLUMINATION	Light source	LED, E27 A60 bulb, included
	Light output	approx. 600 lm
	Colour temperature	2700 K
	CRI	approx. 80+
	Life hours	approx. 15,000
POWER	Input	220–240 V AC; 110–120 V for Canada and Taiwan
	Max. usage	approx. 6 W
	Connection	Wired to a ceiling point by a qualified electrician
DIMMING	Not dimmable as supplied.	
SUSPENSION	Cord	1, 2 or 3 m twisted fabric (your choice), adjustable drop
	Ceiling rose	Replaces the existing fitting
	Lampholder	E27
CARE	Indoor use only. Dust with a dry cloth or a soft brush; keep acetone, solvents and harsh cleaners away from the printed parts. LED bulbs only, never incandescent or halogen: they run far hotter than a printed lamp is made for. Keep out of hot direct sun.	
MATERIALITY	Printed to order, one fine layer at a time, so faint layer lines are part of the surface. Tint can vary slightly between spools: for lamps that must match, order them together.	

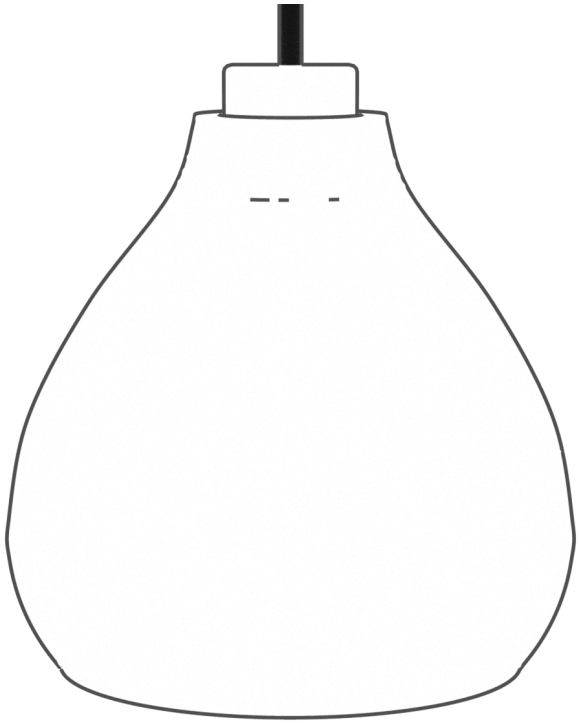

Figures marked approx. are typical of the bulb and fittings supplied and are confirmed against the first lamps made. Specifications may change.

DROP Ø20 · LARGE

OVERVIEW	Designer | Year	Hakumei | 2026
	Dimensions	Ø19.7 × H19.2 cm
	Material	Shade: translucent PLA. Cap: matte PLA.
	Origin	Designed and printed in Malaysia
	Assembly	One printed piece, its cap in a second colour
	Colours	Shade: any of 5 translucent colours. Other parts: any of 9 matte colours, each part its own
ILLUMINATION	Light source	LED, E27 A60 bulb, included
	Light output	approx. 600 lm
	Colour temperature	2700 K
	CRI	approx. 80+
	Life hours	approx. 15,000
POWER	Input	220–240 V AC; 110–120 V for Canada and Taiwan
	Max. usage	approx. 6 W
	Connection	Wired to a ceiling point by a qualified electrician
DIMMING	Not dimmable as supplied.	
SUSPENSION	Cord	1, 2 or 3 m twisted fabric (your choice), adjustable drop
	Ceiling rose	Replaces the existing fitting
	Lampholder	E27
CARE	Indoor use only. Dust with a dry cloth or a soft brush; keep acetone, solvents and harsh cleaners away from the printed parts. LED bulbs only, never incandescent or halogen: they run far hotter than a printed lamp is made for. Keep out of hot direct sun.	
MATERIALITY	Printed to order, one fine layer at a time, so faint layer lines are part of the surface. Tint can vary slightly between spools: for lamps that must match, order them together.	

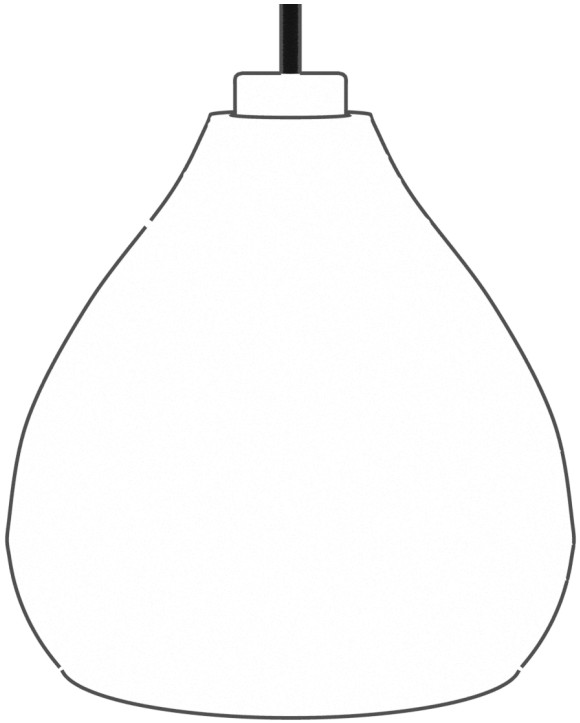

Figures marked approx. are typical of the bulb and fittings supplied and are confirmed against the first lamps made. Specifications may change.